

# Minimax Drop Bagger


Bagger for small particules & multiple items

*PackagingIntelligence*



# Minimax Drop Bagger

Bagger for small particles & multiple items

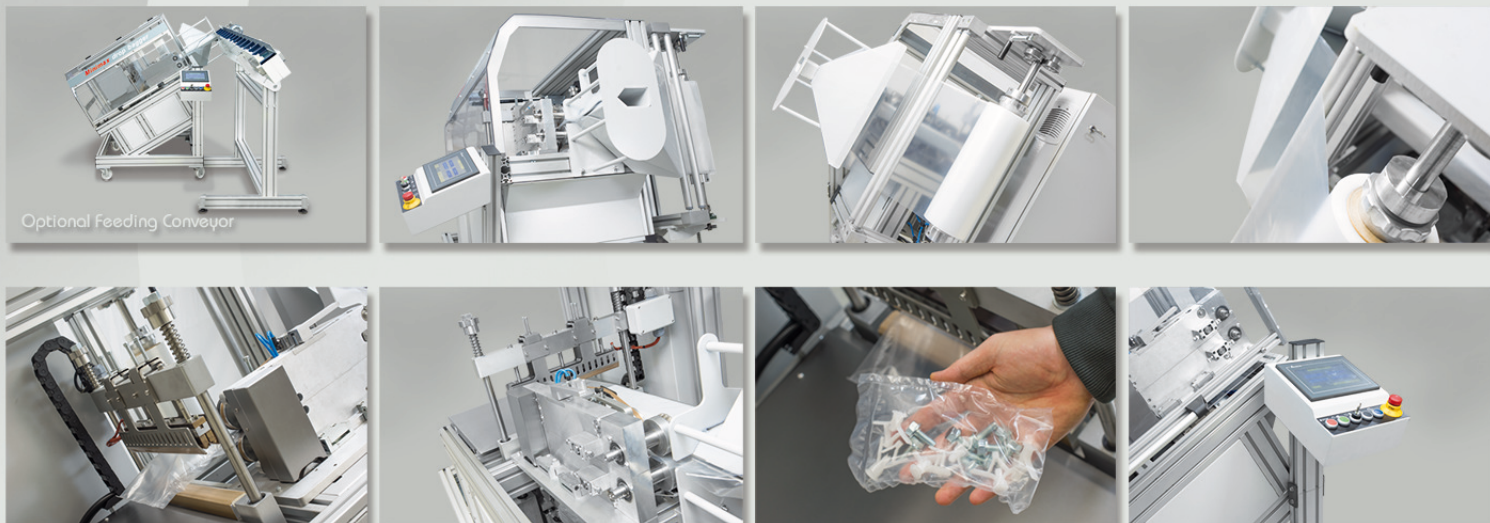

## Technical Specifications

|   |   |  |
|---|---|--|
| <b>Sealer Bar Opening:</b> 100mm          | <b>Maximum Film Width:</b> 550mm                      | <b>Installed Power:</b> 50-60 Hz, 220V, 4 Ampere, 3 Phase              |
| <b>Sealer Bar With:</b> 330mm             | <b>Film Thickness (Minimum / Maximum):</b> 12 - 100µm | <b>Consumption:</b> 3 kW   |
| <b>Feeding Point Height:</b> 1300mm       | <b>Film Types:</b> PE, OPP, CPP, PP, POF, PET, PVC    | <b>Dimensions (Width x Length x Height):</b> 1600 x 1650 x 1500mm      |
| <b>Air Supply:</b> 6 bar                  | <b>Maximum Roll Diameter:</b> Ø 400mm (Flat)          | <b>Palletized Size (Width x Length x Height):</b> 1800 x 1750 x 1700mm |
| <b>Air Consumption:</b> 1,2 liter / cycle | <b>Color:</b> Light gray RAL7035                      | <b>Weight (Net / Gross):</b> 346 kg / 413 kg                           |

## Application:

- Packaging solution for small particules, metal parts, fittings, screws, bateries, etc
- Fully automated and no operator needed
- Very compact and easy to move in facilities
- Continuous side-band sealer technology
- Drop option through the colar folding sytem
- Easy to integrate with the production lines directly

## Features:

- User-friendly color touch screen operator panel
- Automatic packaging-film drive with tension control
- Colar system for folding packaging filmtt
- Trimless packaging with no scrap
- Counter for bags
- Recordable and re-callable package parameter settings

## Sealing:

- PID controlled sealing temperature controlled by touch panel
- Alternative sealing blade structures for various packaging materials
- Wide size side seal for safe closed package

## Flexibility:

- Side seal system can be seperated for film loading
- Side seal sytem lays down with an hinge for easy maintenance
- Easily adjustable with variable lengths
- Language options in touch keyboard
- Memory recepie option for prefixed adjustments

## Optional:

- Feeding solutions by conveyors, drop-off solutions, hand feed etc.
- Printed film applicability by marker detection sensor and programming
- Ability to control additional conveyors by inverters

## Quality:

- ISO9001 quality standards with the relevant norm's confirmation
- World-wide brands for all mechanical, electrical and pneumatic components
- CE certifications, complies with the latest CE directives
- One year warranty on non-wearable parts (extendable)
- Manufacturer's guarantee for spare part stock and after sales support
- Manufacturer's guarantee for spare part stock availability up to 5 years

